

# DETECTION OF CYBER ATTACK IN NETWORK USING ML

**Sanjeevini S.H<sup>1</sup>, B.Mrudulanjali<sup>2</sup>, T Pavani<sup>3</sup>, V.Sowmya<sup>4</sup>, T.Shivani<sup>5</sup>**

<sup>1</sup>Assistant Professor, Department of CSE(CS), MallaReddy Engineering College for Women, Hyderabad, TS, India.

Email: sanjeevinicsecs@gmail.com

<sup>2,3,4,5</sup>UG Students, Department of CSE(CS), MallaReddy Engineering College for Women, Hyderabad, TS, India.

## **ABSTRACT:**

Improvements in PCs and correspondence have brought about broad changes in comparison to the past. The use of new technologies gives individuals, companies and governments unbelievable benefits, even when they are messing against them. For eg, security of major data, safety of data stadiums, accessibility of information etc. Digital fear-based oppression is, depending on these questions, one of the biggest problems of our day. Digital fear, which has brought many problems to citizens and organizations, has come to an extent that could threaten the openness and protection of the nation through numerous events, such as criminal groups, professional individuals and digital activists. In this sense, IDS systems were built to maintain a strategic distance from digital attacks. Intrusion detection systems (IDS) At the moment, learning the computation of the SVM (Bolster Support Vector Machine) was used to identify port sweep efforts that depend on a new data set of CICIDS 2017, which achieved 69.79% individually. We should implement other algorithms, including CNN, ANN and Random Forest, rather than SVM, so that accuracy such as SVM – 93.29, CNN - 63.52, Random Forest – 99.93, ANN – 99.11 can be acquired.

**Keywords:** *IDS, CNN, ANN, SVM, Digital terror.*

## **1. INTRODUCTION**

Improved PCs and correspondence developments have in comparison to the past, contributed to extensive and propelling improvements. The use of novel technologies gives individuals, companies and governments incredible advantages, whether or not they are destroyed. For eg, the safety of essential data, security of revealed data

phases, information accessibility, etc. Digital fear-based oppression, depending on these questions, is nowadays one of the most critical issues. Digital terror, which has posed many problems for people and organizations, has reached a degree that could threaten accessible and security for country, through numerous meetings, such as criminal alliances,

professional people and digital activists. In this respect, IDS has been built to maintain a strategic distance from digital assaults. Right now the measurements of the SVM have been used to classify port sweeping activities based on the latest CICIDS 2017 data set with 97.80%, 69.79% of precise data is carried out individually. Rather than using the SVM, it is possible to join other forest algorithms, such as RF, CNN and ASN, which can be accurate, such as SVM – 93.29, CNN – 63.52, RF – 99.93, ANN - 99.11. Instead of SVM.

## MOTIVATION

The use of new technologies gives individuals, companies and governments unbelievable benefits, even when they are messing against them. For eg, security of major data, safety of data stadiums, accessibility of information etc. Digital fear-based oppression is, depending on these questions, one of the biggest problems of our day. Digital fear, which has brought many problems to citizens and organisations, has come to an extent that could threaten the openness and protection of the nation through numerous events, such as criminal groups, professional individuals and digital activists. In this sense, IDS systems were built to maintain a strategic distance from digital attacks. Intrusion detection systems (IDS)

## 2. EXISTING SYSTEM :

The Almansob and Lomte KDD99 dataset was used in Blamless Bayes and Principal Component Analysis (PCA). Similarly, Chithik and Rabbani have also used PCA, SVM and KDD99 for IDS[10]. In Aljavarskaya et al. The papers, their evaluations and examinations have been transmitted based on the NSL-KDD data set for their IDS model [11] Composite inspectorates indicate that the KDD99 dataset is used continuously for IDS [6]–[10]. KDD99 is therefore older and provides little knowledge about cutting-edge new forms of attack, for example, multi-day misuse etc. In our investigation, we used an innovative and new dataset from CICIDS2017.

## PROPOSED SYSTEM :

This paper tries to find which algorithm can predict best accuracy rates that help to better predict outcomes to identify cyber attacks or not. These predictions are made by four algorithms such as SVM, ANN, RF and CNN. This technique was used to detect cyber attack using machine learning technologies on the network.

### Literature survey:

**2.1 R. 2.1 2.1 "Harbor scanning and defense against them," Christopher, SANS Institute, 2001. 2001. - 2001.**

Port scanning is one of the most common techniques used in network resource finding for attackers. All systems connected via modem to the LAN or the Internet run on common or unknown ports services. The intruder will see the following information on the target devices by way of port scanning, which services are executed by users, support for anonymous logins and authentication of



```

Random Forest

from sklearn.ensemble import RandomForestClassifier
param_grid_rf = {'n_estimators': [50, 60, 70, 80, 90, 100],
                 'max_features': ['2/3', 'sqrt', 'log2']}

from sklearn.model_selection import GridSearchCV
gsrf = GridSearchCV(RandomForestClassifier(),
                    param_grid=param_grid_rf,
                    cv=5,
                    verbose=1, n_jobs=-1)

gsrf_results = gsrf.fit(X_train, y_train)

gsrf_results.best_params_

gsrf_rf.best_score_

gsrf_rf = RandomForestClassifier(max_depth=10, n_estimators=100, max_features='sqrt', n_jobs=-1)
gsrf_rf.fit(X_train, y_train)

gsrf_rf.score(X_test, y_test)

gsrf_rf.predict(X_test)

Support Vector Machine (SVM)

from sklearn.svm import SVC
svm = SVC(kernel='rbf', gamma=0.01, C=1)
svm.fit(X_train, y_train)

svm.score(X_test, y_test)

svm.predict(X_test)

from sklearn.pipeline import make_pipeline
model = make_pipeline(SVC(kernel='rbf', gamma=0.01, C=1))
model.fit(X_train, y_train)

model.score(X_test, y_test)

model.predict(X_test)

from sklearn.model_selection import GridSearchCV
param_grid_svm = {'gamma': [0.001, 0.01, 0.1, 1],
                  'C': [0.1, 1, 10, 100]}
gs_svm = GridSearchCV(model, param_grid)
gs_svm.fit(X_train, y_train)

gs_svm.best_params_
    
```

From the score accuracy we concluding the DT & RF give better accuracy and building pickle file for predicting the user input

**Application**

```

import pickle
import flask
import random

app = flask.Flask(__name__)

@app.route('/')
def index():
    return flask.render_template("index.html")

@app.route('/predict', methods=['POST'])
def predict():
    data = flask.request.json

    # Convert JSON to dictionary
    data_dict = {}
    for key, value in data.items():
        data_dict[key] = value

    # Load the model
    with open('model.pkl', 'rb') as f:
        model = pickle.load(f)

    # Predict the class
    prediction = model.predict(data_dict)

    # Return the prediction
    return flask.jsonify({'prediction': prediction})

if __name__ == '__main__':
    app.run(host='0.0.0.0', port=5000)
    
```

**Localhost - in cmd python app.py**

```


user@ramesh:~/Desktop/41/Finished/second/3/Network-Intrusion-Detection-System$ python3 app.py
/home/user/.local/lib/python3.6/site-packages/sklearn/base.py:334: UserWarning: Trying to unpickle estimator LogisticRegression from version 0.22.1 when using version 0.23.2. This might lead to breaking code or invalid results. Use at your own risk.
  UserWarning)
 * Serving Flask app "app" (lazy loading)
 * Environment: production
   WARNING: This is a development server. Do not use it in a production system!
   Use a production WSGI server instead.
 * Debug mode: off
 * Running on http://127.0.0.1:5000/ (Press CTRL+C to quit)
    
```



**Enter the input**



**Predict attack -**

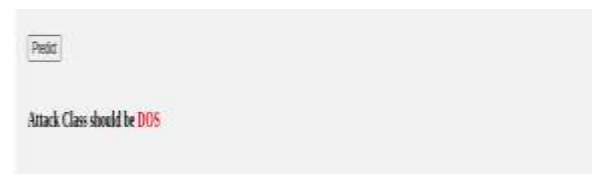

**3. CONCLUSION**

Right now, vector aid estimates, ANN, CNN, Random Forest, and deep learnings based on modern CICIDS2017 dataset have been relatively added. The findings show that the in-depth estimation of learning has obtained essentially better results than SVM, ANN, RF and CNN. With AI and in-depth learning calculations, apache Hadoop and sparkling inventions, we will make



common use of port sweep efforts as well as other assault forms that rely on that dataset. All of this allows us to identify the network cyber threat. It occurs in a way that when we consider the many attacks that occurred over a long period of time, the features of these attacks are preserved in those datasets if they are remembered. We will also predict whether cyber attack is conducted or not using these datasets. This document aims to assess the best prediction algorithms to avoid the best outcomes of cyber attacks. This article can be found in four algorithms including SVM, ANN, RF, CNN.

### **FUTURE SCOPE**

We add some ML algorithms for improvement to improve the precision.

### **REFERENCES**

- [1] K. Graves, Ceh: Official certified ethical hacker review guide: Exam 312-50. John Wiley & Sons, 2007.
- [2] R. Christopher, "Port scanning techniques and the defense against them," SANS Institute, 2001.
- [3] M. Baykara, R. Das,, and I. Karado ğan, "Bilgi g uvenli ğgi sistemlerinde kullanılan arac,larin incelenmesi," in 1st International Symposium on Digital Forensics and Security (ISDFS13), 2013, pp. 231–239.
- [4] S. Staniford, J. A. Hoagland, and J. M. McAlerney, "Practical automated detection of stealthy portscans," *Journal of Computer Security*, vol. 10, no. 1-2, pp. 105–136, 2002.
- [5] S. Robertson, E. V. Siegel, M. Miller, and S. J. Stolfo, "Surveillance detection in high bandwidth environments," in DARPA Information Survivability Conference and Exposition, 2003. Proceedings, vol. 1. IEEE, 2003, pp. 130–138.
- [6] K. Ibrahimi and M. Ouaddane, "Management of intrusion detection systems based-kdd99: Analysis with lda and pca," in *Wireless Networks and Mobile Communications (WINCOM), 2017 International Conference on*. IEEE, 2017, pp. 1–6.
- [7] N. Moustafa and J. Slay, "The significant features of the unsw-nb15 and the kdd99 data sets for network intrusion detection systems," in *Building Analysis Datasets and Gathering Experience Returns for Security (BADGERS), 2015 4th International Workshop on*. IEEE, 2015, pp. 25–31.
- [8] L. Sun, T. Anthony, H. Z. Xia, J. Chen, X. Huang, and Y. Zhang, "Detection and classification of malicious patterns in network traffic using benford’s law," in *Asia-Pacific Signal and Information Processing Association Annual Summit and Conference (APSIPA ASC), 2017. IEEE, 2017*, pp. 864–872.
- [9] S. M. Almansob and S. S. Lomte, "Addressing challenges for intrusion detection system using naive bayes and pca algorithm," in *Convergence in Technology (I2CT), 2017 2nd International Conference for*. IEEE, 2017, pp. 565–568.
- [10] M. C. Raja and M. M. A. Rabbani, "Combined analysis of support vector machine and principle component analysis for ids," in *IEEE International Conference on Communication and Electronics Systems*, 2016, pp. 1–5.